


ALL BLOW-OFFS MUST DISCHARGE TO DAYLIGHT. ADD BENDS AS NECESSARY TO DAYLIGHT AT A DISCHARGE ANGLE NO GREATER THAN 22.5° FROM HORIZONTAL.

VERTICAL OFFSET BLOWOFF DETAIL #1
TO BE USED WHEN CONNECTION TO WATER MAIN IS EIGHT FEET OR GREATER IN DEPTH

| MAIN SIZE | BLOW-OFF SIZE |
|-----------|----------------|
| 2" | 3/4" |
| 4" | 1" |
| 6" | 1-1/2" OR HYD. |
| 8" | 2" OR HYD. |
| 10" | 2" OR HYD. |
| 12" | 4" OR HYD. |
| 14" | 4" OR HYD. |
| 16" | 4" OR HYD. |
| 20" | 6" |
| 24" | 8" |

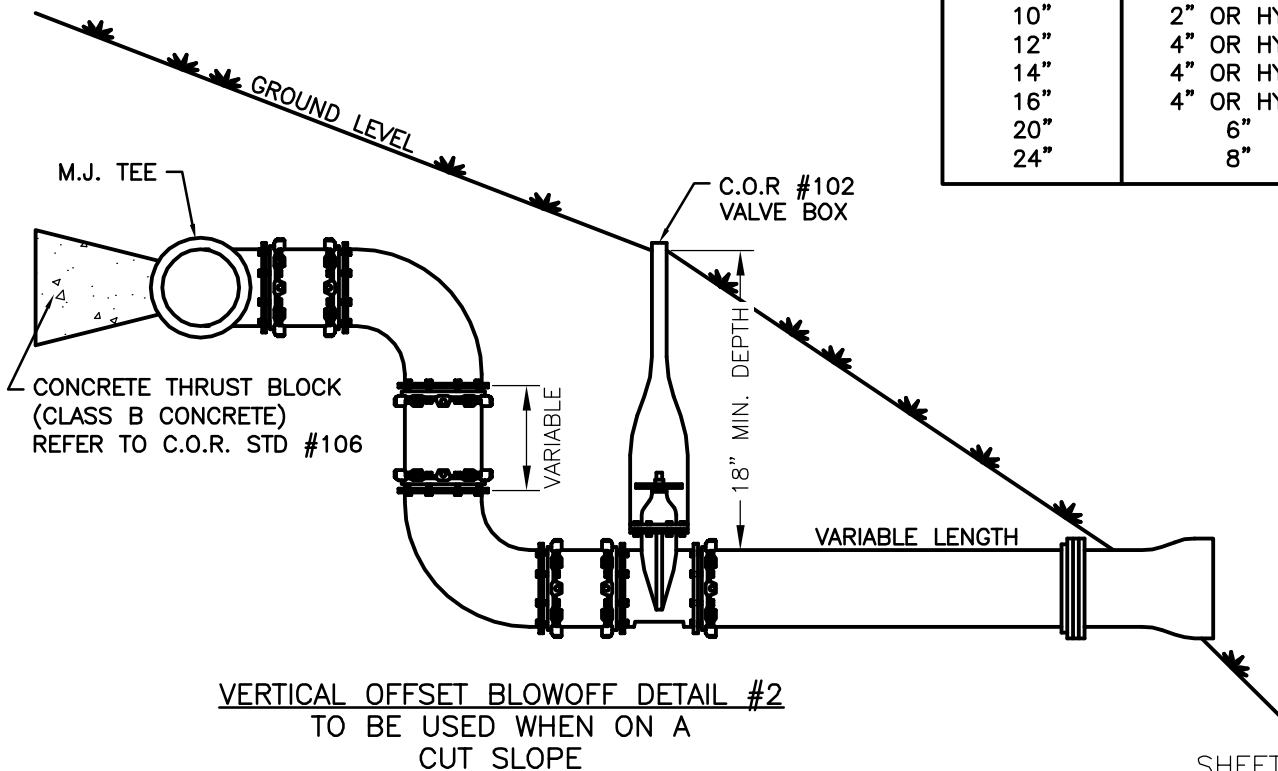

VERTICAL OFFSET BLOWOFF DETAIL #2
TO BE USED WHEN ON A CUT SLOPE

SHEET 2 OF 2
DATE: 3/1/14

CITY OF REIDSVILLE

BLOW-OFF DETAIL (4", 6" & 8")

STD. NO.

REV.

119